
Enterprise 200

Lay-in metal panel in exposed modular top hat grid.







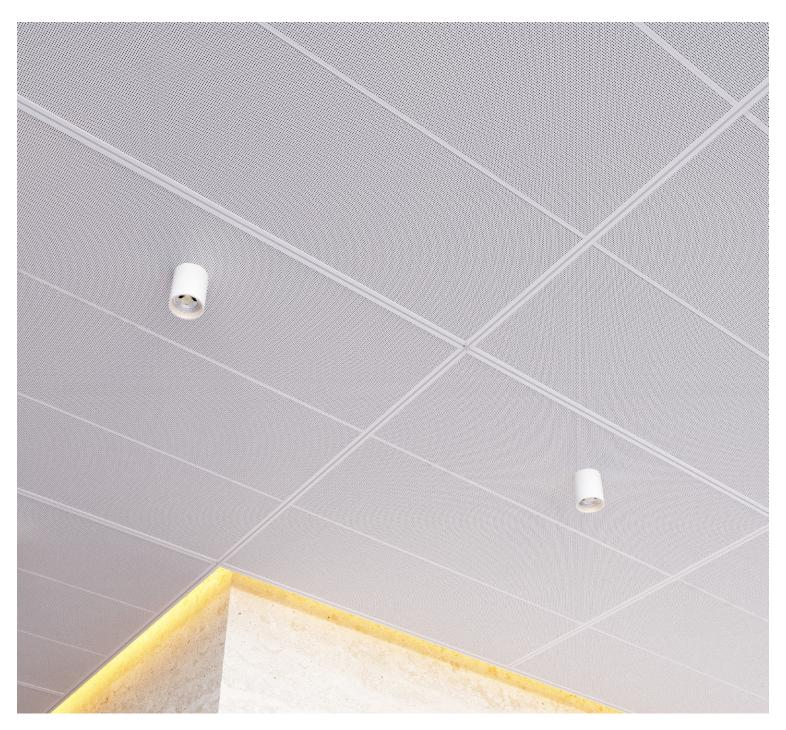









EXPOSED GRID

UP TO 1.0 NRC

GROUP 1

CLABLE

25 YEAR WARRANT

Product	Enterprise 200
Grid	32mm x 50mm aluminium top hat grid, exposed modular 2-way
Size	1200mm x 1200mm, 1350mm x 1350mm, 1500mm x 1500mm. Bespoke modules on request
Material	Steel or Aluminium
Perforation	Compatible with Enterprise perforation patterns, bespoke patterns on request
Mesh	Compatible with Enterprise mesh, bespoke mesh on request
Finish	Polyester powder-coated (PPC) Timber effect Bespoke finishes on request
Acoustic	Acoustic fleece, pad or board. Performance is dependent on pattern open area and infill. Absorption: up to 1.0 NRC Attenuation: up to 37dB
Fire	NCC Group 1 (ISO 9705:2016)
Environment	Global GreenTag GreenRate Level A Low VOC ISO 14001 and ISO 9001 Recycable and designed for disassembly Product stewardship program
Technical	Services integration supported Seismic: project specific
Section	A suspension bracket B top hat main runner C top hat main runner splice D top hat cross runner E tile B A B B B
Section	D A
<u>— 4. </u>	E B