
Enterprise 220

Lay-in metal panel in exposed T bar grid.





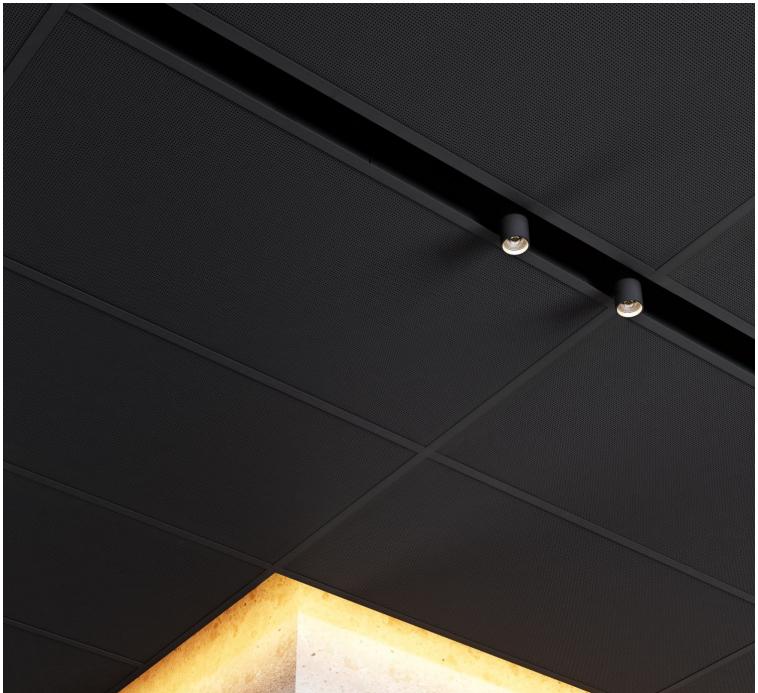

ENTERPRISE ARCHITECTURAL

Metal Ceiling Solutions











EXPOSED GRID

UP TO 1.0 NRC

NCC GROUP 1

RECYCLABLE

25 YEAR WARRANTY

Product	Enterprise 220
Grid	24mm x 38mm aluminium T bar grid, exposed 2-way
Size	1200mm x 600mm, 600mm x 600mm,1350mm x 450mm, 450mm x 450mm, 1500mm x 500mm, 500mm x 500mm. Bespoke modules on request
Material	Steel or Aluminium
Perforation	Compatible with Enterprise perforation patterns, bespoke patterns on request
Mesh	Compatible with Enterprise mesh, bespoke mesh on request
Finish	Polyester powder-coated (PPC) Timber effect Bespoke finishes on request
Acoustic	Acoustic fleece, pad or board. Performance is dependent on pattern open area and infill. Absorption: up to 1.0 NRC Attenuation: up to 37dB
Fire	NCC Group 1 (ISO 9705:2016)
Environment	Global GreenTag GreenRate Level A Climate Active certified Carbon Neutral opt-in available Low VOC ISO 14001 and ISO 9001 Recyclable and designed for disassembly Product stewardship program Carbon Neutral PRODUCT CreenRate Carbon Neutral PRODUCT GreenTag GreenT
Technical	Services integration supported Seismic: project specific
Isometric	A suspension bracket B t bar main runner 3600mm C t bar main runner splice D t bar cross runner 1200mm E t bar cross runner 600mm F tile A
Section	B F