
Enterprise 400

Linear batten ceiling with optional acoustic infill panels.



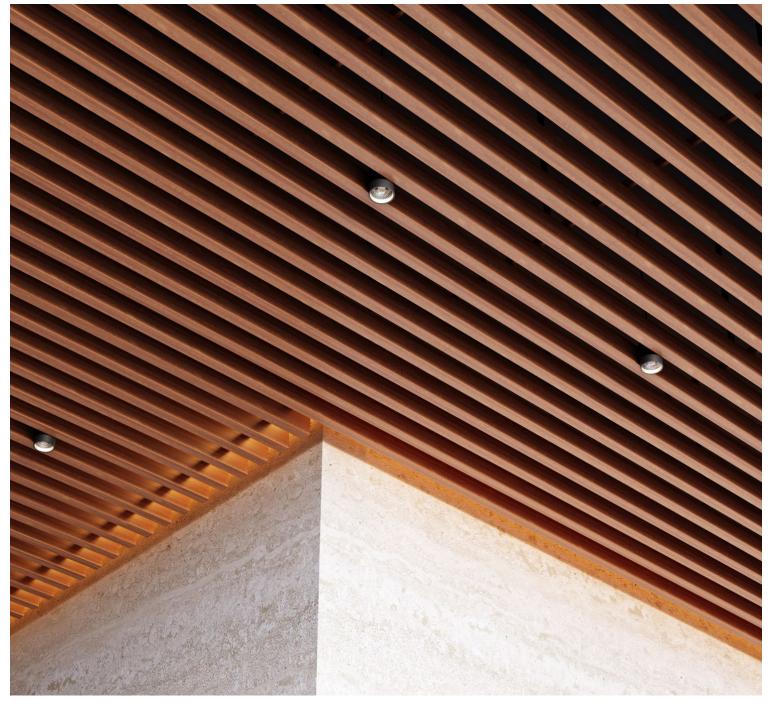

ENTERPRISE ARCHITECTURAL

Metal Ceiling Solutions











IBLE OR UP TO 1.0 NRC


NCC GROUP 1

RECYCLABLE


25 YEAR WARRANTY

Product	Enterprise 400
Grid	Visible or concealed grid options
Profile	100mm x 25mm, 100mm x 50mm, 150mm x 50mm, more sizes and shapes available
Material	Aluminium battens, steel grid
Perforation	Applicable only for acoustic infill tiles, which span between battens
Finish	Polyester powder-coated (PPC) Anodise Timber effect Bespoke finishes on request
Acoustic	Acoustic fleece or acoustic pad in infill tiles. Absorption: Up to 1.0 NRC when acoustic infill tiles are installed between battens. Performance is dependent on pattern open area and panel infill.
Fire	NCC Group 1 (ISO 9705:2016)
Environment	Global GreenTag GreenRate Level A Low VOC ISO 14001 and ISO 9001 Recyclable and designed for disassembly Product stewardship program GreenRate GreenRate GreenRate
Technical	Services integration supported Seismic: project specific

Isometric

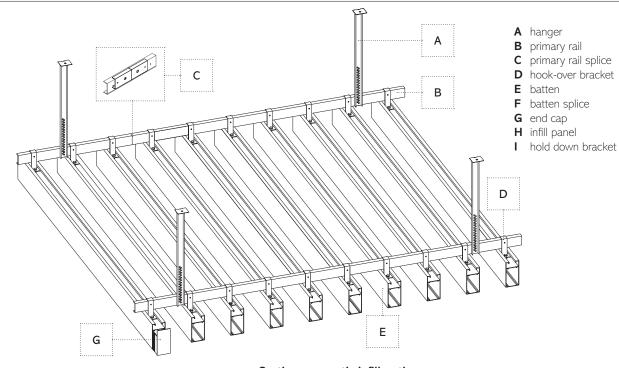

Section - no acoustic infill option



Section - acoustic infill option

