

CLEANSHIELD




RECYCLED
CONTENT




FIRE
PERFORMANCE



BIO-SOLUBLE
(NOTE Q)



100%
ASBESTOS-FREE




25 YEAR
WARRANTY

Material Mineral fibre

Surface Vinyl-laminated face with sealed back and edges

Pattern Non directional pattern design

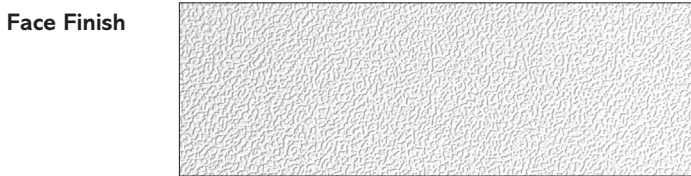

Colours  

Environment ISO 14001 and ISO 9001

Recycled % 72% recycled content

Fire Rating NCC GROUP 1 (ISO 9705:2016)

Performance	Thickness	NRC	CAC	LRV	RH
	15mm	0.65	35	0.90	95
	19mm	0.70	40	0.90	99

Size Guide

Note: more module and size options available.


Enterprise 100
Two-Way Top Hat Grid

Module	Length	Width	C Spline
1200mm	1188mm	396mm / 3 Tiles	25mm
	1188mm	297mm / 4 Tiles	25mm
	1188mm	237.6mm / 5 Tiles	25mm
1350mm	1338mm	446mm / 3 Tiles	35mm
	1338mm	334.5mm / 4 Tiles	25mm
	1338mm	267.6mm / 5 Tiles	25mm
1500mm	1488mm	496mm / 3 Tiles	35mm
	1488mm	372mm / 4 Tiles	35mm
	1488mm	297.6mm / 5 Tiles	25mm


Module	Length	Width	C Spline
Enterprise 130 One-Way Grid	1200mm	600mm max.	25mm
	1350mm	450mm max.	25mm / 35mm
	1500mm	500mm max.	25mm / 35mm

Module	Length	Width	T Bar
Enterprise 120 / 160 T Bar Grid	1200x600mm	1193mm	593mm
	600x600mm	593mm	593mm


Edge Details



Top Hat grid
with c-spline edge
Ref: CS



Top Hat grid
with square edge
Ref: SQ



T Bar grid
with square edge
Ref: SQ



15mm T Bar grid
with tegular edge
Ref: TG15



24mm T Bar grid
with tegular edge
Ref: TG24