

## CLEANSHIELD




RECYCLED  
CONTENT




FIRE  
PERFORMANCE



BIO-SOLUBLE  
(NOTE Q)



100%  
ASBESTOS-FREE




25 YEAR  
WARRANTY

**Material** Mineral fibre

**Surface** Vinyl-laminated face with sealed back and edges

**Pattern** Non directional pattern design

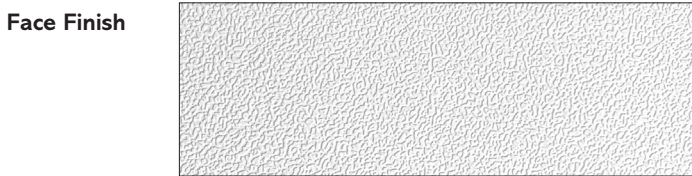

**Colours**  

**Environment** ISO 14001 and ISO 9001

**Recycled %** 72% recycled content

**Fire Rating** NCC GROUP 1 (ISO 9705:2016)

Performance	Thickness	NRC	CAC	LRV	RH
	15mm	0.65	35	0.90	95
	19mm	0.70	40	0.90	99

### Size Guide

Note: more module and size options available.


Enterprise 100  
Two-Way Top Hat Grid

Module	Length	Width	C Spline
1200mm	1188mm	396mm / 3 Tiles	25mm
	1188mm	297mm / 4 Tiles	25mm
	1188mm	237.6mm / 5 Tiles	25mm
1350mm	1338mm	446mm / 3 Tiles	35mm
	1338mm	334.5mm / 4 Tiles	25mm
	1338mm	267.6mm / 5 Tiles	25mm
1500mm	1488mm	496mm / 3 Tiles	35mm
	1488mm	372mm / 4 Tiles	35mm
	1488mm	297.6mm / 5 Tiles	25mm


Module	Length	Width	C Spline
Enterprise 130 One-Way Grid	1200mm	600mm max.	25mm
	1350mm	450mm max.	25mm / 35mm
	1500mm	500mm max.	25mm / 35mm

Module	Length	Width	T Bar
Enterprise 120 / 160 T Bar Grid	1200x600mm	1195mm	595mm
	600x600mm	595mm	595mm

### Edge Details




Top Hat grid  
with c-spline edge  
Ref: CS



Top Hat grid  
with square edge  
Ref: SQ



T Bar grid  
with square edge  
Ref: SQ



15mm T Bar grid  
with tegular edge  
Ref: TG15



24mm T Bar grid  
with tegular edge  
Ref: TG24